



REC'D 01 NOV 2004	
WIPO	PCT



INVESTOR IN PEOPLE

The Patent Office
 Concept House
 Cardiff Road
 Newport
 South Wales
 NP10 8QQ

PRIORITY DOCUMENT

SUBMITTED OR TRANSMITTED IN
 COMPLIANCE WITH RULE 17.1(a) OR (b)

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.


In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules:

Signed

Dated 27 April 2004

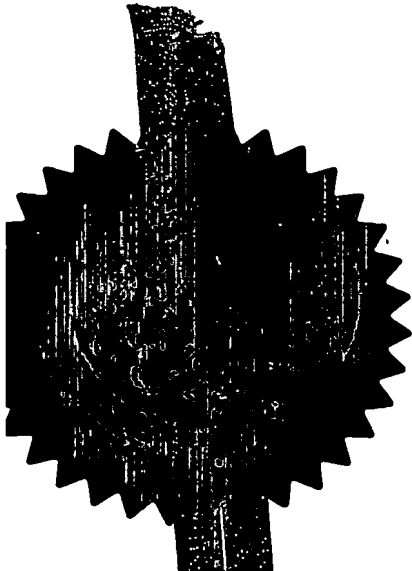

BEST AVAILABLE COPY

THE PATENT OFFICE
RN

23 OCT 2003

RECEIVED BY FAX

The
Patent
Office

177
P01/7700 0.00-0324749.1

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form.)

The Patent Office

Cardiff Road
Newport
Gwent NP23 5RD

1. Your reference

SMC 60625/GB/P1

2. Patent application number

(The Patent Office will fill in this part)

0324749.1

23 OCT 2003

3. Full name, address and postcode of the or of each applicant (underline all surnames)

Avecia Limited
Hexagon House
Blackley
Manchester, M9 8ZS
United Kingdom

Patents ADP number (if you know it)

07764137001

If the applicant is a corporate body, give the country/state of its incorporation

GB

4. Title of the invention

COMPOSITIONS

5. Name of your agent (if you have one)

MAYALL, John

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

Avecia Limited
Hexagon House
Blackley
Manchester, M9 8ZS
United Kingdom

Patents ADP number (if you know it)

6244313002

7764137001

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if)

- a) any applicant named in part 3 is not an inventor, or
- b) there is an inventor who is not named as an applicant, or
- c) any named applicant is a corporate body.

See note (a)

22-50 15 99235

DUPLICATE

COMPOSITIONS

This invention relates to non-aqueous radiation curable inks and to their use in ink jet printing.

Ink jet printing is a non-contact method by which droplets of ink are ejected through a fine nozzle onto a substrate. There are many demanding performance requirements for inks used in ink jet. For example they are required to pass through the fine ink jet nozzles without blocking them. They desirably provide sharp, non-feathered images having good water-, solvent- light- and ozone-fastness, attractive colour and high optical density. Further desirable properties for ink jet printing inks include a fast dry time (to facilitate high-speed printing), a low viscosity to enable the inks to be used in a wide range of ink jet printers, excellent mechanical resistance (to avoid the prints being rubbed off), low curl and good adhesion to a range of substrates.

Ink jet printing inks typically used in home and office ink jet printers are typically aqueous and contain organic solvents. While these inks have acceptable performance when printing on absorbent substrates such as paper, they are not of much use for printing non-absorbent substrates such as metals or plastics. Furthermore the dry times of conventional aqueous ink jet inks, and even solvent-based ink jet inks, can be rather long. The resultant images can suffer from poor rub-fastness and light-fastness (often due to the presence of dyes rather than pigments). Solvent-based inks have the disadvantage of releasing volatile organic chemicals into the atmosphere and creating malodours or fire hazards in confined areas lacking adequate ventilation.

According to the first aspect of the present invention there is provided a non-aqueous, radiation-curable ink comprising pigment, dispersant and a liquid carrier, wherein the pigment has an acid value greater than 8 mg of NaOH per gram of pigment.

Preferably the pigment has covalently attached acidic groups, e.g carboxy, phosphato and/or sulpho groups, especially carboxy groups.

Preferably the pigment has a pH below 7.

The acid value of the pigment is preferably greater than 9, more preferably greater than 10, especially greater than 12 mg of NaOH per gram of pigment. In one embodiment the acid value is up to 40 mg of NaOH per gram of pigment.

The acid value of the pigment is the number of milligrams of sodium hydroxide required to neutralise the 1g of pigment. This may be measured by a number of methods, preferably by suspending 5g of the pigment in 60cm³ of 0.1M sodium hydroxide solution, sonicating the suspension for 30 minutes at 25°C, removing the pigment by filtration and titrating 25cm³ of the filtrate using 0.05M sulphuric acid to a pH of 7.0 according to a glass electrode pH meter, wherein the acid value is calculated by the following equation:

acid value = $(40 - (1.6 \times (\text{volume in cm}^3 \text{ of } 0.05\text{M sulphuric acid titrate required to achieve the pH of } 7.0))) \text{ mg of NaOH per gram of pigment.}$

For example, 12.6 cm³ of 0.05M sulphuric acid titrate shows the pigment had an acid value of 20 mg of NaOH per gram of pigment. 5 cm³ shows the pigment had an acid value of 32 mg of NaOH per gram of pigment. If the pigment is expected to have an acid value above 40 this may be measured using the same method described above except that less than 6g of pigment is used (e.g. 2.5g or 1.25g and so forth) and the equation is modified in proportion to the reduction in pigment weight (e.g. doubling, quadrupling and so forth).

The pH of the pigment may be determined by sonicating 10 parts of the pigment in 100 parts of deionised water for 30 minutes then measuring the pH of the water using a glass electrode pH meter, wherein all parts are by weight.

Preferably the pigment has a pH of less than or equal to 6, more preferably less than or equal to 5, especially less than or equal to 4.

The amount of pigment in the ink is preferably 0.1 to 14%, more preferably 1 to 10% and especially 1.1 to 8% by weight, relative to the total weight of the ink. Preferred pigments are yellow, magenta, cyan, black, blue, indigo, violet, green, orange or red and mixtures comprising two or more thereof. Preferably the ink is free from titanium dioxide.

The pigment is preferably a carbon black pigment, more preferably a carbon black pigment having a BET surface area of 50 to 400 m²/g, more preferably 100 to 300 m²/g. The BET surface area may be determined by ISO 4652.

Carbon black pigments with an DBP absorption of 50 to 200 ml/100g, more preferably 60 to 170 ml/100g, especially 80 to 140 ml/100g, more especially 105 to 115 ml/100g are preferred due to their wetting properties. DBP absorption may be measured by JIS (Japanese Institute of Standards) method K6221.

The pigment is preferably in the form particles which are small enough to pass through the very fine nozzles used in the printheads of ink jet printers. Typically these nozzles are half the diameter of a human hair. Thus the average particle size of the pigment is preferably 14 to 120nm, more preferably 18 to 60nm especially 20 to 30nm as this results in particularly good curing of the ink. Preferably 90% or more of the pigment particles are within 50% of the average particle size. By choosing particles of this size advantages can be achieved in terms of storage stability for the ink, cure speed and high optical density for the resultant prints. Pigment particle sizes outside these ranges may be used where printheads having particularly large nozzle diameters are used. Very fine dispersions of pigments and methods for their preparation are disclosed in, for example, EP 0 776 952, US 5,538,548, US 5,443,628, EP 0 269 130, US 5,285,084, EP 0 429 828 and EP 0 526 198.

For information, the primary particle size, BET surface area, DBP absorption and pH of various commercially available pigments are as follows:

Supplier	Product Name	Primary Particle Size (nm)	BET surface Area (m ² /g)	DBP Absorption (ml/100g)	pH
Degussa	S 170	17	200	150	4.5
Degussa	S180	20	150	150	
Degussa	Special Black 4	25	180	110	3
Degussa	Special Black 5	20	240	130	
Degussa	Special Black 6	17	300	160	Ca 2.5
Degussa	Special Black 650	25	110	47	2.8
Degussa	Special Black 350	31	65	45	3.5
Degussa	Special Black 250	56	40	46	3.1
Degussa	Special Black 550	25	110	47	2.8
Degussa	Special Black 160T	29	400	110	4
Degussa	Colour Black FW1	13	320	170	Ca 4
Degussa	Colour Black FW200	13	460	150	Ca 2.5
	Printex® V		110	120	Ca 4

The amount of dispersant in the ink is preferably 0.1 to 10%, more preferably 0.3 to 8% and especially 0.5 to 6% by weight, relative to the total weight of the ink.

Preferred dispersants include those containing amine and/or imine groups, for example a polyester amine or imine, especially the reaction product of a poly(C₂₋₄-alkylene)imine with a polyester having a free carboxylic acid group, in which there are at least two polyester chains attached to each poly(C₂₋₄-alkylene)-imine chain. As dispersants the reaction products of poly(ethylenimine) and/or polyalkylamine with ε-caprolactone and/or δ-valerolactone are especially preferred.

Suitable dispersants and their preparation are described in detail in US patent number 6,197,877, the disclosure of which is incorporated herein by reference thereto.


Examples of suitable dispersants include Solsperse™ 11000, Solsperse™ 32000, Solsperse™ 9000, (available from Avecia Limited) and P92-9590 (available from Sun Chemical).

The pigment and dispersant are preferably added to the ink as a mixture. For example, a mixture of a pigment and a dispersant may be made by milling pigment in a small amount of the liquid carrier with a milling media, e.g. glass beads. The pigment dispersion is then typically screened and "let down" by slowly adding the remaining liquid carrier.

The amount of liquid carrier in the ink is preferably 76 to 99.8%, more preferably 82 to 98.7% and especially 86 to 98.4% by weight, relative to the total weight of the ink. Preferably the carrier comprises a mixture of (meth)acrylate compounds, more preferably a mixture comprising one or more mono (meth)acrylate compounds, one or more di

(meth)acrylate compounds and one or more compounds having three or more (meth)acrylate groups.

Mono (meth)acrylate compounds have one (and only one) acrylate or methacrylate group. This group is, as is known in the art, polymerisable when irradiated in the presence of a photo-initiator. (Meth)acrylate groups are represented by the formula:



wherein R is H or methyl.

The mono (meth)acrylate compound is preferably a monomer. Examples of mono (meth)acrylate monomers include cyclic trimethylolpropane formal (meth)acrylate, ethoxylated tetra hydrofurfuryl (meth)acrylate, phenoxy ethyl (meth)acrylate, trimethylol propane formal (meth)acrylate, lauryl (meth)acrylate, stearyl (meth)acrylate, monomethoxy neopentyl glycol propoxylate mono (meth)acrylate, monomethoxy tripropylene glycol mono (meth)acrylate, 2-(2-ethoxyethoxy) ethyl (meth)acrylate, iso-decyl (meth)acrylate, iso-octyl (meth)acrylate, iso-nonyl (meth)acrylate, tridecyl (meth)acrylate, iso-bornyl (meth)acrylate, ethoxyl nonyl phenol (meth)acrylate, ethoxylated phenol (meth)acrylate, 2-hydroxyl ethyl (meth)acrylate, 4-hydroxyl butyl (meth)acrylate, 2-hydroxy propyl (meth)acrylate, iso-butyl (meth)acrylate, tert-butyl (meth)acrylate, cetyl (meth)acrylate, cyclohexyl (meth)acrylate, ethyl hexyl (meth)acrylate, 2-dimethyl amino ethyl (meth)acrylate, trifluoro ethyl (meth)acrylate, 3-methoxy butyl (meth)acrylate, dicyclopentenyl (meth)acrylate, polyethylene glycol mono (meth)acrylate and poly propylene glycol mono (meth)acrylate. Preferred mono (meth)acrylate monomers include lauryl (meth)acrylate, tetrahydro furfuryl (meth)acrylate, 2-(2-ethoxyethoxy)ethyl (meth)acrylate, iso-octyl (meth)acrylate, iso-decyl (meth)acrylate, tridecyl (meth)acrylate, dodecyl (meth)acrylate, isobornyl (meth)acrylate, cyclic trimethylol propane formal (meth)acrylate.

Di (meth)acrylate compounds have two (and only two) groups selected from acrylate and methacrylate.

Preferred di (meth)acrylate compounds are di (meth)acrylate monomers, for example di(meth)acrylates of 1,4-butane diol, 1,6-hexane diol, neopentyl glycol, mono, di, tri and poly ethylene glycols, mono, di, tri and poly propylene glycols, mono methoxy ethoxylated trimethylolpropane, propoxylated neopentyl glycol, ethoxylated neopentyl glycol, 1,2-butylene glycol and ethoxylated hexane diol.

The compound(s) having three or more (meth)acrylate groups have three or more groups selected from acrylate and methacrylate. The compound having three or more (meth)acrylate groups is preferably a monomer, oligomer or polymer, preferred examples of which include trimethylol propane tri(meth)acrylate, ethoxylated trimethylol propane tri(meth)acrylate, propoxylated trimethylol propane tri(meth)acrylate, glycerol

tri(meth)acrylate, propoxylated glycerol tri(meth)acrylate, pentaerythritol tri(meth)acrylate, pentaerythritol tetra(meth)acrylate, tris (2-hydroxyethyl) isocyanurate triacrylate, ditrimethylol propane tetra (meth)acrylate, ethoxylated pentaerythritol tetra(meth)acrylate, ethoxylated di-pentaerythritol tetra (meth)acrylate, tetra methylol methane tetra (meth)acrylate, multifunctional (meth)acrylate-urethanes, (meth)acrylate-polyesters and (meth)acrylate acrylios.

In view of the above preferences the carrier preferably comprises a mixture of:

(a) 0 to 70 parts, more preferably 10 to 60 parts of mono (meth)acrylate compound(s);

(b) 5 to 99.9 parts, more preferably 10 to 85 parts of di (meth)acrylate compound(s);

(c) 0 to 70 parts, more preferably 5 to 50 parts of compound(s) having three or more (meth)acrylate groups; and

(d) 0.1 to 15 parts, more preferably 4 to 12 parts of one or more photoinitiator(s);

wherein all parts are by weight and the number of parts (a) + (b) + (c) + (d) add up to 100.

Preferred photoinitiators include alpha diketones, monoketals of alpha-diketones or ketoaldehydes, acylolins and their corresponding ethers, chromophore-substituted halo-s-triazines, and chromophore-substituted halomethyl-oxadiazoles. Specific examples of photoinitiators include acetophenone, propiophenone, 2-phenyl-acetophenone, 2-chloro-2-phenyl-acetophenone, 2,2-dichloro-2-phenyl-acetophenone, 2-butoxy-2-phenyl acetophenone, 2,2-dimethoxy-2-phenyl-acetophenone, 2,2-diethoxy-acetophenone, 2-methylol-2-methoxy-2-phenyl acetophenone, benzophenone, 4-trichloromethyl benzophenone, indenone, 1-3-Indanedione, fluorenone, xanthone, thioxanthone, 2-chlorothioxanthone, anthraquinone, 2-ethylanthraquinone, biacetyl, glyoxal, 1,2-Indanedione, p-chlorophenyl-glyoxal, benzil, camphoquinone, and benzoin methyl and ethyl esters. The ink optionally further contains one or more co-initiators or amine synergists in order to improve cure rate. Examples include Isopropylthioxanthone, ethyl-4-(dimethylamine) benzoate, 2-ethyl hexyl dimethylaminobenzoate and dimethylaminoethyl methacrylate. Preferably the photoinitiator is other than a cationic photoinitiator. Commercial photoinitiators particularly suitable for use in the present invention include Speedcure™ ITX Speedcure™ EHA, and Irgacure™ 369.

Preferably the photoinitiator is soluble in the carrier.

A single photoinitiator may be used although it is preferable the photoinitiator is a mixture of two or more photoinitiators because this can lead to a broader spectral response improved depth of cure and improved cure rate with opacifying pigments such as carbon black.

Preferably the carrier further comprises a stabiliser to improve the storage stability of the ink and prevent premature curing. The stabiliser is preferably an antioxidant, a radical trap, a radical quencher or the like, e.g. a phenol, thiol, quinone, hydroquinone, amine, xanthate or an N-alkyl or N-aryl anilines. Too much stabiliser will prevent cure

entirely. Hence preferred amounts of stabiliser are 0 to 10 parts, more preferably 0.01 to 5 parts, and especially 0.1 to 3 parts by weight relative to the total number of parts of carrier. Mixtures of stabilisers are preferable for the best ink storage lifetime.

Preferably the ink is curable by actinic radiation or particle beams, especially by ultraviolet light or electron beam radiation.

Optionally the carrier further comprises a polymer or oligomer containing no (meth)acrylate groups, e.g. one or more vinyl ethers and/or styrene. Preferably the polymer and oligomer containing no (meth)acrylate groups is present in the ink at from 0 to 15 parts, more preferably 0 to 10 parts and most preferably 0 to 5 parts by weight relative to the total weight of the carrier.

Preferably inks of the present invention are substantially solvent free. That is to say no solvent or water is present in the ink except for trace amounts which may be present as impurities in any of the ink components. Preferably any such residues are less than 2%, more preferably less than 0.5% and especially less than 0.01% by weight relative to the total weight of ink.

The viscosity of the inks of the present invention is preferably 1 to 30 mPa.s, more preferably from 2 to 25 mPa.s at 60°C. The ink composition may optionally have a higher viscosity at room temperature provided that the final ink meets the above viscosity requirements at the above temperature.

The surface tension of the ink of the present invention is preferably below dynes/cm.

Inks of the present invention are preferably free from particles that would block an ink jet nozzle. To achieve this the ink may be filtered through a filter with a pore size of less than 10µm, more preferably less than 3µm and especially less than 1µm.

Bearing in mind the above preferences, a particularly preferred ink according to the invention is a non-aqueous, substantially solvent-free radiation curable ink having a viscosity of 1 to 30 mPa.s at 60°C comprising:

- (i) 1 to 10 % of one or more pigments having an acid value in the range 12 to 40 mg of NaOH per gram of pigment, a BET surface Area of 100 to 260m²/g and a DBP absorption of 80 to 150ml/100g;
- (ii) 0.5 to 6% of one or more dispersants having amine and/or imine groups; and
- (iii) the balance to 100% being a liquid carrier;

wherein all % are by weight and the liquid carrier comprises a mixture of:

- (a) 0 to 70 parts, more preferably 10 to 60 parts of one or more mono (meth)acrylate compound(s) selected from the group consisting of cyclic trimethylolpropane formal (meth)acrylate, ethoxylated tetra hydrofurfuryl (meth)acrylate, phenoxy ethyl (meth)acrylate, trimethylol propane formal (meth)acrylate, lauryl (meth)acrylate, stearyl (meth)acrylate, monomethoxy neopentyl glycol propoxylate mono (meth)acrylate, monomethoxy tripropylene glycol mono (meth)acrylate, 2-(2-ethoxyethoxy) ethyl

(meth)acrylate, iso-decyl (meth)acrylate, iso-octyl (meth)acrylate, iso-nonyl (meth)acrylate, tridecyl (meth)acrylate, iso-bornyl (meth)acrylate, ethoxyl nonyl phenol (meth)acrylate, ethoxylated phenol (meth)acrylate, 2-hydroxyl ethyl (meth)acrylate, 4-hydroxyl butyl (meth)acrylate, 2-hydroxy propyl (meth)acrylate, iso-butyl (meth)acrylate, tert-butyl (meth)acrylate, cetyl (meth)acrylate, cyclohexyl (meth)acrylate, ethyl hexyl (meth)acrylate, 2-dimethyl amino ethyl (meth)acrylate, trifluoro ethyl (meth)acrylate, 3-methoxy butyl (meth)acrylate, dicyclopentenyl (meth)acrylate, polyethylene glycol mono (meth)acrylate and poly propylene glycol mono (meth)acrylate and mixtures thereof;

(b) 5 to 99.9 parts, more preferably 10 to 85 parts of one or more di (meth)acrylate compound(s) selected from the group consisting of di(meth)acrylates of 1,4-butane diol, 1,6-hexane diol, neopentyl glycol, mono, di, tri and poly ethylene glycols, mono, di, tri and poly propylene glycols, mono methoxy ethoxylated trimethylolpropane, propoxylated neopentyl glycol, ethoxylated neopentyl glycol, 1,2-butylene glycol and ethoxylated hexane diol and mixtures thereof;

(c) 0 to 70 parts, more preferably 5 to 50 parts of one or more compound(s) having three or more (meth)acrylate groups selected from the group consisting of trimethylol propane tri(meth)acrylate, ethoxylated trimethylol propane tri(meth)acrylate, propoxylated trimethylol propane tri(meth)acrylate, glycerol tri(meth)acrylate, propoxylated glycerol tri(meth)acrylate, pentaerythritol tri(meth)acrylate, pentaerythritol tetra(meth)acrylate, tris (2-hydroxyethyl) isocyanurate triacrylate, ditrimethylol propane tetra (meth)acrylate, ethoxylated pentaerythritol tetra(meth)acrylate, ethoxylated di-pentaerythritol tetra (meth)acrylate, tetra methylol methane tetra (meth)acrylate, multifunctional (meth)acrylate-urethanes, (meth)acrylate-polyesters and (meth)acrylate acrylics and mixtures thereof; and

(d) 0.1 to 15 parts, more preferably 4 to 12 parts of one or more photoinitiator(s);

wherein all parts are by weight and the number of parts (a) + (b) + (c) + (d) add up to 100.

The liquid carrier may of course contain further components. In addition to components (a) to (d) specified above, for example preservatives, biocides, rheology modifiers, surfactants, levelling agents, antifoaming agents, anti-kogation agents and combinations thereof. The requirement for the number of parts (a) + (b) + (c) + (d) add up to 100 is merely intended to define the ratio of these components relative to one another in the liquid.

In this preferred ink the one or more mono (meth)acrylate compounds consists of a mixture of isobornyl acrylate; the one or more di (meth)acrylate compounds

are tripropylene glycol diacrylate and dipropylene glycol diacrylate; mixture of one or more compound having three or more (meth)acrylate groups is trimethylpropane triacrylate and (ethoxylated), trimethylpropane triacrylate. Preferably the pigment is a carbon black pigment having a pH in below 7. Such carbon blacks are commercially available and are often manufactured by oxidizing a neutral carbon black during routine manufacture (for example gas black manufacture where oxygen has been introduced into the gas stream).

In contrast to conventional ink jet printing inks, the inks of the present invention possess several potential advantages. They can be formulated completely free from solvent, making them substantially more environmentally friendly than conventional solvent-based inks in which considerable amounts of solvent are emitted into the atmosphere. When ink jet printing non-absorbing substrates, e.g. metals and plastics, the speed of printing for the present inks can be much greater than for the conventional aqueous and solvent-based inks resulting in greater productivity.

Compared to conventional ink jet printing inks, the inks of the present invention have several industrial printing advantages in regard to the quality of the printing and reduced tendency to block the fine nozzles typically used in ink jet printers.

According to a second aspect of the present invention there is provided a process for printing an image onto a substrate comprising applying thereto an ink according to the first aspect of the present invention by means of an ink jet printer and curing the ink, preferably using an electron beam or more preferably using ultra violet light. Printed substrates obtained by this process form a further feature of the present invention.

Preferred substrates are metal, plastic, ceramic, glass, wood and papers. Preferred applications include printing for home/office use, packaging, labelling and barcodes, particularly wide format graphics, signage, wall coverings and decorative laminates.

According to a third aspect of the present invention there is provided an ink jet printer cartridge comprising a chamber and an ink wherein the ink is present in the chamber and is as defined in the first aspect of the invention.

The invention is further illustrated by the following examples in which all parts and percentages are by weight unless otherwise stated.

Example 1 and Comparative Examples C1, C2 and C3

The procedure for preparing all inks described in Table 1 was as follows:

Preparation of Millbases

Millbases were prepared by bead milling the pigment with approximately 60% of the Sartomer 306 described in the Example together with all the Solsperser™ dispersant(s) indicated in Table 2 until a fine particle dispersion was formed.

Preparation of Inks

The remaining components indicated in Table 1 for each ink were then added to the millibases in the dark and the mixture was homogenised and then filtered through 3µm and 1µm Pall Profile II 1" cartridge segments.

Results

The inks described in Table 1 (Example 1 and Comparative Examples C1 to C3) were tested for jetting performance in a Toshiba TEC grey scale print head controlled by a Kensa PCB board. The print testing was carried out using the following procedure. First, the print head thoroughly was purged with ink to remove air bubbles. The heating system was adjusted to achieve a constant jetting temperature of 45°C. Then the print head drive voltage was adjusted (ca. 20 – 25 volts) such that the head is firing 42pl drops drop volume for each head. Next the print head was operated for 5 minutes and the number of nozzles lost after five minutes was recorded. At the end of the 5 minute print test the head was cleaned and the 5 minute print test was repeated. This test was performed 12 times in total for each ink and the total number of nozzles "lost" (i.e. the total number of nozzles which stopped working) during the 12 tests was recorded in Table 2.

Table 1

Ingredient Commercial name	Technical Description	Comparative Example C1 %	Comparative Example C2 wt%	Comparative Example C3 wt%	Example 14 wt %
Regal 260R™	Carbon Black pigment	2.60	—	—	—
Special Black 250™	Carbon Black pigment	—	2.50	—	—
Special Black 350™	Carbon Black pigment	—	—	2.50	—
Special Black 4™	Carbon Black pigment	—	—	—	2.50
Solsperse™ 32000	Dispersant having amino/imino groups	1.56	0.60	0.80	0.94
Solsperse™ 5000	Dispersant	0.09	0.00	0.00	0
Sartomer™ 506	Isobornyl acrylate	36.55	37.40	37.20	36.35
Actilane™ 422	dipropyleneglycol diacrylate	18.00	18.00	18.00	18.00
Sartomer™ 306	tripropyleneglycol diacrylate	11.50	11.50	11.50	12.21
Actilane™ 430	Ethoxylated trimethylolpropane triacrylate	10.00	10.00	10.00	10.00
Actilane™ 251	Urethane tri acrylate oligomer	10.00	10.00	10.00	10.00
Irgacure™ 369	Photo-initiator	4	4	4	4
Speedcure™ EHA	Amine Synergist	4	4	4	4
Speedcure™ ITX	Photo-Initiator	2	2	2	2

Table 2

Example	Properties of the pigment						Ink jetting
	Carbon Black	pH	Acid Value. (mgNaOH/ g pigment)	Primary particle size (nm)	BET (m ² /g)	DBP	Total No. of lost nozzles
C1	Regal 250R	7.75	0	34	55		5
C2	Special Black 250	3.95	3.8	56	40		4
C3	Special Black 360	4.16	4.4	31	65		12
1	Special Black 4	2.88	27.8	25	180	110	0

- 5 The above table shows that the Ink of Example 1 has better jetting reliability than any of the Comparative Examples (C1, C2, C3).

CLAIMS

1. A non-aqueous, radiation-curable ink comprising pigment, dispersant and a liquid carrier, wherein the pigment has an acid value greater than 8 mg of NaOH per gram of pigment.
2. An ink according to claim 1 having a viscosity of 1 to 30 mPa.s at 60°C.
3. An ink according to any one of the preceding claims wherein the dispersant contains amine and/or imine groups.
4. An ink according to any one of the preceding claims wherein the dispersant is a polyester amine or imine.
5. An ink according to any one of the preceding claims wherein the pigment is carbon black pigment having a BET surface area of 50 to 400 m²/g.
6. An ink according to any one of the preceding claims wherein the pigment is carbon black pigment having DBP absorption of 50 to 200 ml/100g.
7. An ink according to any one of the preceding claims wherein the pigment has a Ph of less than or equal to 6.
8. An ink according to any one of the preceding claims wherein the pigment has covalently attached acidic groups.
9. An ink according to any one of the preceding claims which is substantially solvent-free.
10. An ink according to any one of the preceding claims wherein the carrier comprises a mixture comprising one or more mono (meth)acrylate compounds, one or more di (meth)acrylate compounds and one or more compounds having three or more (meth)acrylate groups.
11. An ink according to any one of the preceding claims wherein the carrier comprises a mixture of:
 - (a) 0 to 65 parts of mono (meth)acrylate compound(s);
 - (b) 10 to 99.9 parts of di (meth)acrylate compound(s);
 - (c) 0 to 70 parts of compound(s) having three or more (meth)acrylate groups;and

(d) 0.1 to 15 parts of photoinitiator(s);

wherein all parts are by weight and the number of parts (a) + (b) + (c) + (d) add up to 100.

12. An ink according to any one of the preceding claims which is free from particles that would block an ink jet nozzle.

13. An ink according to any one of the preceding claims a non-aqueous, substantially solvent-free radiation curable ink having a viscosity of 1 to 30m Pa.s at 60°C comprising:

(i) 1 to 10 % of one or more pigments having an acid value in the range 12 to 40 mg of NaOH per gram of pigment, a BET surface Area of 100 to 250m²/g and a DBP absorption of 80 to 150ml/100g;

(ii) 0.5 to 6% of one or more dispersants having amine and/or imine groups; and

(iii) the balance to 100% being a liquid carrier;

wherein all % are by weight and the liquid carrier comprises a mixture of:

(a) 10 to 66 parts of one or more mono (meth)acrylate compound(s) selected from the group consisting of cyclo trimethylolpropane formal (meth)acrylate, ethoxylated tetra hydrofurfuryl (meth)acrylate, phenoxy ethyl (meth)acrylate, trimethylol propane formal (meth)acrylate, lauryl (meth)acrylate, stearyl (meth)acrylate, monomethoxy neopentyl glycol propoxylate mono (meth)acrylate, monomethoxy tripropylene glycol mono (meth)acrylate, 2-(2-ethoxyethoxy) ethyl (meth)acrylate, iso-decyl (meth)acrylate, iso-octyl (meth)acrylate, iso-nonyl (meth)acrylate, tridecyl (meth)acrylate, iso-bornyl (meth)acrylate, ethoxyl nonyl phenol (meth)acrylate, ethoxylated phenol (meth)acrylate, 2-hydroxyl ethyl (meth)acrylate, 4-hydroxyl butyl (meth)acrylate, 2-hydroxy propyl (meth)acrylate, iso-butyl (meth)acrylate, tert-butyl (meth)acrylate, cetyl (meth)acrylate, cyclohexyl (meth)acrylate, ethyl hexyl (meth)acrylate, 2-dimethyl amino ethyl (meth)acrylate, trifluoro ethyl (meth)acrylate, 3-methoxy butyl (meth)acrylate, dicyclopentenyl (meth)acrylate, polyethylene glycol mono (meth)acrylate and poly propylene glycol mono (meth)acrylate and mixtures thereof;

(b) 20 to 70 parts of one or more di (meth)acrylate compound(s) selected from the group consisting of di(meth)acrylates of 1,4-butane diol, 1,6-hexane diol, neopentyl glycol, mono, di, tri and poly ethylene glycols, mono, di, tri and poly propylene glycols, mono methoxy ethoxylated trimethylolpropane, propoxylated neopentyl glycol, ethoxylated neopentyl glycol, 1,2-butylene glycol and ethoxylated hexane diol and mixtures thereof; and

(c) 5 to 50 parts of one or more compound(s) having three or more (meth)acrylate groups selected from the group consisting of trimethylol propane tri(meth)acrylate, ethoxylated trimethylol propane

propoxylated trimethylol propane tri(meth)acrylate, glycerol tri(meth)acrylate, propoxylated glycerol tri(meth)acrylate, pentaerythritol tri(meth)acrylate, pentaerythritol tetra(meth)acrylate, tris (2-hydroxyethyl) isocyanurate triacrylate, ditrimethylol propane tetra (meth)acrylate, ethoxylated pentaerythritol tetra(meth)acrylate, ethoxylated di-pentaerythritol tetra (meth)acrylate, tetra methylol methane tetra (meth)acrylate, multifunctional (meth)acrylate-urethanes, (meth)acrylate-polyesters and (meth)acrylate acrylics and mixtures thereof; and

(d) 0.1 to 15 parts of one or more photoinitiator(s);

wherein all parts are by weight and the number of parts (a) + (b) + (c) + (d) add up to 100.

14. A process for printing an image onto a substrate comprising applying thereto an ink according to any one of the preceding claims by means of an ink jet printer and curing the ink;

15. A printed metal, plastic, ceramic, glass, wood or paper substrate obtained by the process of claim 14.

16. An ink jet printer cartridge comprising a chamber and an ink wherein the ink is present in the chamber and is as defined in any one of claims 1 to 13.

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.